


GUARDIAN “Lift ’n Spin”


Low Profile Lift Tables

The “Lift ’n Spin” has all of the features of our standard low profile “Guardian” Series lift table with the added advantage of a built-in rotating top. The rotating top greatly enhances the operation of the lift table by reducing reach effort or walk around in order to access the load. The low profile of only 4¼" including the rotating top allows the table to be loaded by an electric or manual pallet truck by use of the optional loading ramp.

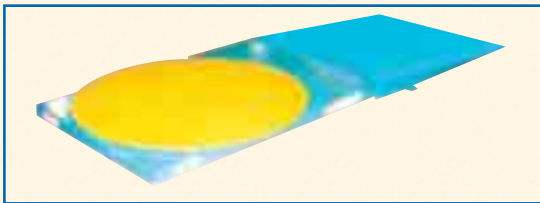

**“Lift ’n Spin” in a
4¼" lowered position**


The “Lift ’n Spin” has a raised height of 35", ideal for most applications.

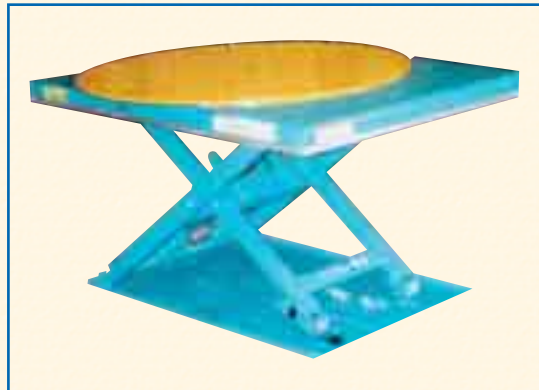

**Model LPBL-20-2-LS
With Spin Top and
“Auto-Transition Plate”**

The 45" diameter rotating top eliminates having to walk around or reach across the table.

The “Lift ’n Spin” shown with an optional loading ramp. Custom ramp sizes are also available.

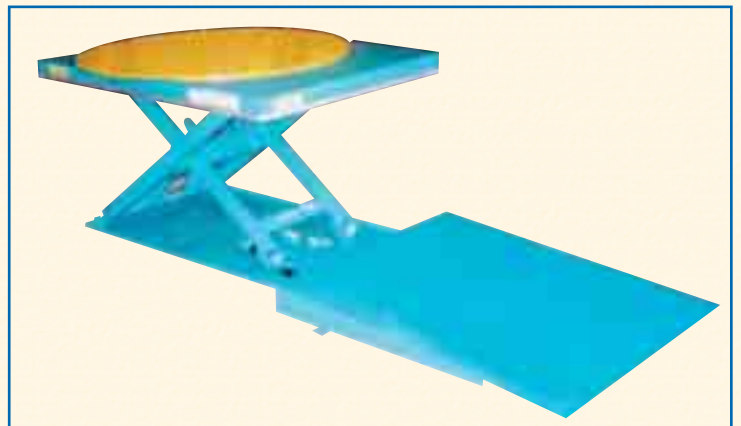

**“Lift ’n Spin” with Optional Ramp
Ramp sizes available: 36", 42", 48"**

GUARDIAN Series

Low Profile "Lift 'n Spin" Lift Table

Standard Features:

The "Guardian" Series meets and exceeds both U.S. (ANSI) and European safety standards.

- Upper platform fitted with safety perimeter bar, which prevents descent on contact with obstructions.
- Low-tension (24V) control box with up-down buttons. In addition the "Guardian" series includes an electric circuit re-set button in case the safety perimeter is actuated.
- New design external power pack equipped with a relief valve against overloading and a compensated flow valve for controlling lowering speed. The power pack is supplied with hoses 8' long.
- 115 voltage single phase 230/460 voltage three phase is available as an option.
- Upper limit switch.
- Single acting cylinders with drainage system and check valve to stop the lift table lowering in case of hose burst.
- Safety clearance between scissors to prevent trapping during operations.
- Mechanical blocks for safe maintenance operations.
- Self-lubricating bushings on pivot points.
- Removable lifting eye(s) to facilitate handling and installation of the lift table.
- Motor 1 HP.



The exclusive "Auto-Transition Plate" is a key feature of the "Lift 'n Spin" lift table. This unique feature provides a smooth transition from the optional ramp onto the rotating top. Once the table is raised $\frac{1}{4}$ ", the "Auto-Transition Plate" automatically lowers to allow the top to rotate. When the table is fully lowered, the "Auto-Transition Plate" raises again to provide a smooth surface to load the next pallet.

A remote power unit features a 1 HP motor. This is a highly efficient and quiet pump motor combination. A three-button control box has 115-volt single phase and runs on a 20 amp circuit. 230/460 3 phase is optional.



Vertical Travel	Model	Capacity (Lbs.)	Platform Size	Base Frame	Lowered Height	Raised Height	Lift Speed (Seconds)	Motor (HP)
30-3/4"	LPBL-20-2-LS	2,000	39 1/2 x 55"	29" x 52 3/4"	4 1/4"	35"	18	1

OPTIONS:

- Rotation brake in lowered position
- Foot Controls
- 48" Round Top

LIFT PRODUCTS, INC.

Lift Products, Inc.
P.O. Box 349
Elm Grove, Wisconsin 53122-0349
262.860-1895 • FAX 262.860-1894
Toll free 877.LIFTPRO (877.543.8776)
www.liftproducts.com

Distributed By: